

#### **Test Requirement:**

According to the requirement of the Module C2 (SPC CE-062\_EN M5 PPE) of Applus+, the test item(s) of the sample is according to the standard EN149:2001+A1:2009.

Product Name: Filtering Half Mask

Report No.: PTC21030502102C-EN01

**APPLUS +With ID** 

number:

21/32302024

Client: Mezorrison Health Science & Technology (Shenzhen) Co.,Ltd.

Client Address: No.12 Yuhe Road, Shiyan Town, Baoan District, Shenzhen

Manufacturer: Mezorrison Health Science & Technology (Shenzhen) Co.,Ltd.

Manufacturer Address: 2nd floor, Gaoke building, No.8 Tangkeng Rd, Shiyan, Baoan district,

Shenzhen, China

Contact: Mr. Chen Ping

Model(s): MZC-KZ(S)

Classification: FFP2 NR

**Date of Tests:** 2021.04.26~2021.04.30

Signed for and on Behalf of PTC

Prepare by: Checked by:

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted.

The report could not be copied without permission

pproved by:



#### 1 490 2 01 1

### **Summary of assessment**

Clause									Assessment
7.3 Visual inspection	20	50	50	00	NG.	20	20	20	PASS
7.5 Material	XG.	XO.	20	20	XO.	XO.	70	XO.	PASS
7.9.1 Total inward leakage	X.O.	~ C	×0	V.C.	X	- C	V C)	V ()	PASS
7.9.2 Penetration of filter ma	aterial	Q.	Q.	Ø.	Q.	Q	Q	Q	PASS
7.12 Carbon dioxide conten	nt of the	e inhal	ation a	ir	STO.	Sign Sign	SILO.	6/10	PASS
7.16 Breathing resistance	\$10	\$1°	20	égo.	\$KO	\$1°C	\$10	00	PASS
7.18 Demountable parts	χG.	XG.	XC.	χG	χG	70	χG	χG	N/A

#### Remark:

PASS: comply with requirement of standard

N/A: not application



Report No.:PTC21030502102C-EN01 Issue Date:Apr.30, 2021 Page 3 of 13

#### Test Result:

Requirement	Test Result	Conclusion
7.3 Visual inspection		
The visual inspection shall also include the marking and the information supplied by the manufacturer.	Comply	Pass
7.5 Material		
Materials used shall be suitable to withstand handling and wear over the period for which the particle filtering half mask is designed to be used.	No mechanical failure after	
Any material from the filter media released by the air flow through the filter shall not constitute a hazard or nuisance for the wearer.	undergoing the conditioning described in	Pass
After undergoing the conditioning described in 8.3.1 none of the particle filtering half masks shall have suffered mechanical failure of the facepiece or straps.	8.3.1, No collapse when conditioned in accordance with	1 ass
When conditioned in accordance with 8.3.1 and 8.3.2 the particle filtering half mask shall not collapse.	8.3.1 and 8.3.2.	

#### 7.9.1 Total inward leakage

For particle filtering half masks fitted in accordance with the manufacturer's information, at least 46 out of the 50 individual exercise results (i.e. 10 subjects x 5 exercises) for total inward leakage shall be not greater than 25 % for FFP1, 11 % for FFP2, 5 % for FFP3 and, in addition, at least 8 out of the 10 individual wearer arithmetic means for the total inward leakage shall be not greater than 22 % for FFP1, 8 % for FFP2, 2 % for FFP3.

FFP2, Test	
results are	
shown in Annex	Pass
A Table	
7.9.1-A&B	

### 7.9.2 Penetration of filter material

The penetration of the filter of the particle filtering half mask shall meet the requirements of Table 1.

	Sodium chloride test 95 l/min	Paraffin oil test 95 l/min
FFP1	≤ 20%	≤ 20%
FFP2	≤6%	≤ 6%
FFP3	≤ 1%	≤ 1%

FFP2, Test
results are
shown in Annex
A Table 7.9.2.

This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted.

The report could not be copied without permission

Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China. Tel: 86-769-38808222 Fax: 86-769-38826111 http://www.ptc-testing.com



#### 7.12 Carbon dioxide content of the inhalation air

The carbon dioxide content of the inhalation air (dead space) shall not exceed an average of 1,0 % (by volume)

Test results are shown in Annex A Table 7.12.

**Pass** 

7.16 Breathing resistance

	Maximum permitted resistance (mbar)								
Classification	∠O ∠O Inha	Exhalation							
6, 6, 6,	30 l/min	95 l/min	160 l/min						
O FFP1	0.6	2.1 🛴	<u> </u>						
FFP2	0.7	2.4	3.0						
∠O FFP3 ∠O	ر 1.00 ر	3.0 🗸 🔾	χO 3.0 χO						

FFP2. Test results
are shown in Annex
A Table 7.16.

#### 7.18 Demountable parts

All demountable parts (if fitted) shall be readily connected and secured, where possible by hand

No demountable parts.

N/A



### **Annex A: Summarization of Test Data**

### Table 7.9.1-A: Inward Leakage Test Data

Test specification: EN 149:2001+A1:2009 Clause 8.5

Subject	Sample No.	Condition	Walk (%)	Head Side/side (%)	Head up/down (%)	Talk (%)	Walk (%)	Mean (%)
Shi	1	A.R	3.8	4.0	4.4	4.7	4.2	4.2
éli é	2	A.R	5.3	5.6	5.5	5.8	5.2	5.5
Liu _c	3 0	A.R	4.8	5.0	4.5	5.4	5.3	5.0
Liu	4	A.R	4.2	4.1	4.9	4.9	5.0	4.6
Zhang	5	A.R	4.0	4.9	4.7	4.5	4.2	4.5
Xu	6	T.C	4.7	4.4	4.3	4.5	4.4	4.5
Wu	6 7 6 °	T.C	4.1	4.7	4.3	4.4	4.5	4.4
Yu	8	T.C	4.5	4.5	4.6	4.7	4.8	4.6
₹ Li ₹	9	T.C	3.9	4.3	4.0	4.6	4.4	4.2
χ£u χ <sup>©</sup>	10	T.C	4.3	4.1	3.9	4.0	3.8	4.0

Table 7.9.1-B: Facial dimension

Subject	Face Length	Face Width	Face Depth	Mouth Width	
Shi 102		127	72	47	
(° Kai Ko	Li 100		82	51	
Liu	101	114	73	47	
Liu 104		117	76	46	
Zhang	Zhang 107		84	52	
Xu	98	120	83	54	
○ Wu	102	113	82	53	
Yu 103		117	84	51	
Li 103		116	83	48	
Lu C	102	116	74	52	



**Report No.:PTC21030502102C-EN01** Issue Date:Apr.30, 2021 Page 6 of 13

### Table 7.9.2: Penetration of filter material

Test specification: EN 149:2001+A1:2009 Clause 8.11

Aerosol	Condition	Sample No.	Penetration (%)	Assessment				
4, 4, 4, 4	4, 4, 4, 4,	(1)	0.4	4, 4, 4,				
40 A0 A0 A	As received	12	0.4	20 20 AC				
4. 4. 4.		13	0.4	X X X				
to to to	to to to to to	14	0.6	No No No				
Sodium chloride test	Simulated wearing treatment	15	0.3	50 60 6				
4 6 6 6 6 6		16	0.2	4, 4, 4,				
XO XO XO	0 0 0 0 0	0 17	0 1.50	XO XO X				
6. 6. 6.	Mechanical strength + Temperature conditioned	18	1.5	8. 8. 8.				
NO NO NO S	remperature conditioned	19	1.3	Pass				
-6, -6, -6	.6 .0 .0 .0 .0	20	1.3	Fass				
\$ \$ \$ \$ \$	As received	21	1.2	4 4 4				
0 0 O		22	0 1,10 ,0	XO XO X				
8, 8, 8, 4	5, 6, 6, 6,	23	1.1	6, 6, 6,				
Paraffin oil test	Simulated wearing treatment	24	1.3	yo yo yo				
		25	0.7	0 0				
		26	0.5	40 40 40				
20 20 20	Mechanical strength + Temperature conditioned	27	0.6	20 ZO ZO				
6, 6, 6,	remperature conditioned	28	1.4	6, 6, 6,				

### Table 7.12: Carbon dioxide content of the inhalation air

Test specification: EN 149:2001+A1:2009 Clause 8.7

Condition	Sample No.	Res	Assessment			
40 40 40	29	0.05	40 40 40 4	1 40 40 40		
As received	30	0.05	Mean value:	Pass		
	31	0.05	0.05	0 20 20 20		



### Table 7.16: Breathing resistance (mbar)

Test specification: EN 149:2001+A1:2009 Clause 8.9

6 6	Flow Ra	ite 🥎	~ (i)		32			Q.		33			( )		34		
x		30 I/min	ک د	Ç ,	0.51	ÇG .	XO	20	10	0.51	~	, , (	٠, ٥	9 /	0.49	χ <sup>©</sup>	KG.
As received	Inhalation	95 I/min	· ×	o X	1.80		X.	Υ	Y.C.	1.75	×	×	, ×	G X	1.78		ς. 
4 4	Exhalation	160	Α	В	С	D	E	Α	В	С	D	E	Α	В	С	D	E
80 80	Landidion	l/min	2.21	2.22	2.20	2.27	2.26	2.18	2.23	2.19	2.20	2.22	2.24	2.27	2.23	2.27	2.26
0.00	Flow Ra	ite			35			.0		36			3		37		
Simulated	( )	30 I/min	Q	Q	0.42		8	()	8	0.39	6	6,	Q.	Ó	0.39		5
wearing treatment	Inhalation	95 I/min	Š	0 6	1.48	KO ,	\$CO	ĕ,O	\$10	1.42	\$ C	· 61	) 5°	OÓ	1.47	ζς ,	200
χO χC	Exhalation	160	. А	οВ	СС	D	χE	Α	В	С	D	, E,	А	υВ	CC	D	χĒ
8, 8,	Exhalation	l/min	2.03	2.05	2.03	2.02	2.06	2.02	2.01	2.03	2.03	2.00	2.02	2.03	2.03	2.05	2.07
\$ 500 STC	Flow Ra	ite		Ó	38	KO,	SY'O	& CO	810	39	Silver	1	of the second	Ó	40	KO (	3/0
Temperature		30 I/min	5 X	G ,	0.39	KO.	XO	χG	70	0.45	χς.	1 1	5 1	0	0.43	χO	20
conditioned	Inhalation	95 I/min	. 9	~	1.53		Υ	Υ	Υ	1.56	4	8		~ ~	1.54		<
Silver Silver	Exhalation	160	Α	В	С	D	έE	Α	В	С	D	E	Α	В	С	D	E
X0 X0	Exhalation	l/min	1.96	1.95	1.93	1.98	1.94	1.96	1.97	1.98	1.94	1.97	1.93	1.97	1.91	1.91	1.94
Assessment	× ×	_ <	_ <	_ <			· ·	Pa	ss	×	×	×	_ <		_		

A: Facing directly ahead B: Facing vertically upwards C: Facing vertically downwards



Test	Uncertainty
Total inward leakage	3.8%
Penetration of filter material(NaCl)	3.5%
Penetration of filter material(Paraffin oil)	4.2%
Carbon dioxide content of the inhalation air	4.5%
Breathing resistance(30L/min)	5.2%
Breathing resistance(95L/min)	5.4%
Breathing resistance(160)L/min)	6.0%


### Photo(s) of Sample:





**Report No.:PTC21030502102C-EN01** Issue Date:Apr.30, 2021 Page 9 of 13



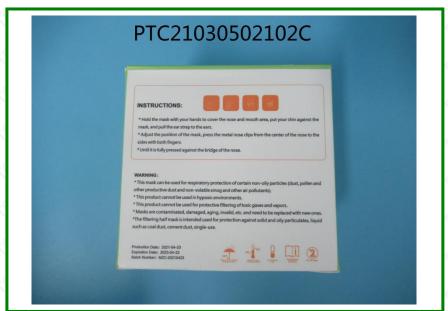


This report is issued according to the general clauses in www.ptc-testing.com by PTC. Responsibility, guarantee and law restriction are defined in the general service clauses. The report is only responsible for the submitted sample(s) except as otherwise noted.

The report could not be copied without permission

Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China. Tel: 86-769-38808222 Fax: 86-769-38826111 http://www.ptc-testing.com




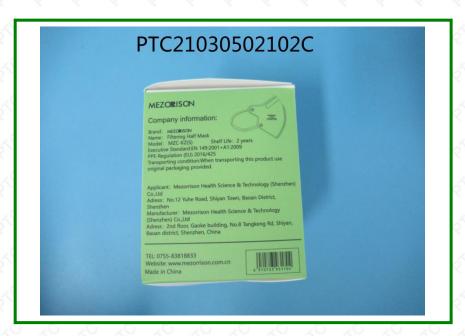








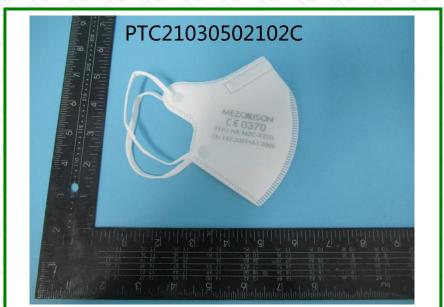






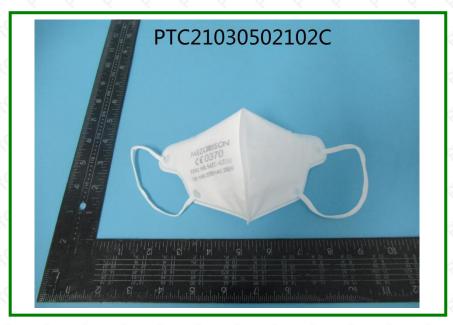



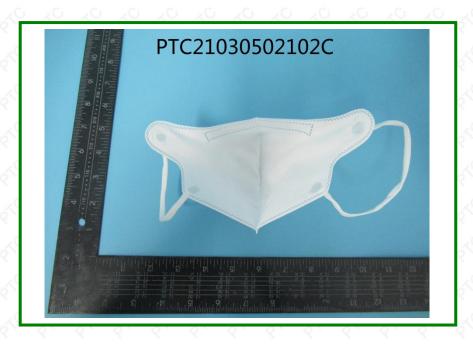

\*\*\*End of Report\*\*\*